


## Installation / Maintenance

# Neutralizer® AC

## Filter Media Replacement

### Model 6500

Replace the filter media as follows:

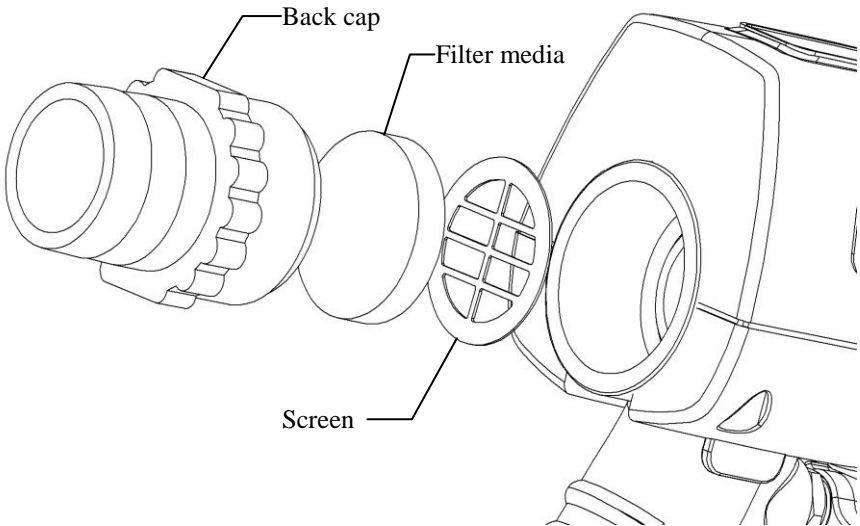

1. Remove the back cap of the Neutralizer® AC Ionizing Blow Gun, by turning it counter-clockwise.
2. Remove filter media and screen.
3. Place screen and new filter media in back cavity.
4. Attach the back cap to the Neutralizer® AC Ionizing Blow Gun. Cap to be hand tight, do not over tighten.

Note: If the air directional cylinder falls out during the filter change, put the cylinder back in with the arrow for air flow pointing toward the front of the blow gun.



2937 Alt Boulevard / PO Box 310 / Grand Island, NY 14072-0310  
PHONE 716 773 7634 / FAX 716 773 7744 / EMAIL sales@nrdinc.com / WEB www.nrdinc.com