


Staticmaster® Linear Alpha Ionizers



TECHNOLOGY
& LAB

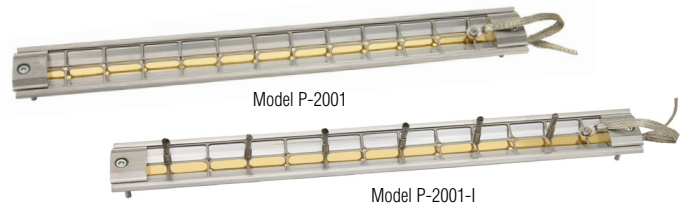

INDUSTRIAL



AUTOMOTIVE

MODEL P-2001 & P-2001-I

ALPHA

Staticmaster® Linear Alpha Ionizers are ideal for web type applications and in flammable or explosive environments where electrical ionizers are not suitable.

Because no external power source is required to operate, these ionizers are an economical, effective means to eliminate static.

The Model P-2001, the base model of the series, delivers ionization right where it is needed. It produces a uniform balanced ionization along its active length, which can be customized in one inch increments from 4" - 142".

The Model P-2001-I, is designed for maximum reduction of high static levels of charge. In applications where static levels exceed 3000 volts, the P-2001-I features stainless steel induction brushes uniformly spaced along its length. This dual mode of ionization allows for increased web speeds, lower static levels, and a safer work environment.

Both Linear Alpha Ionizer models offer optional accessory, Model 4275, that adds the air moving capability of a brass air tube. This combination is ideal when working with irregular shaped parts or when the static eliminator cannot be placed close to the problem area or when the removal of dust and debris is required.

APPLICATIONS

- Web processes, coating, laminating

FEATURES

- Intrinsically safe design
- No external power supply
- Flexible options for maximum ionization

BENEFITS

- No emitter points to clean
- No need for electrical power
- Safe and easy to install
- Low maintenance

EVERY SITUATION IS UNIQUE. SO IS EVERY SOLUTION.®




Staticmaster® Linear Alpha Ionizers

MODEL P-2001 & P-2001-I


ALPHA

SCHEMATICS

Model P-2001

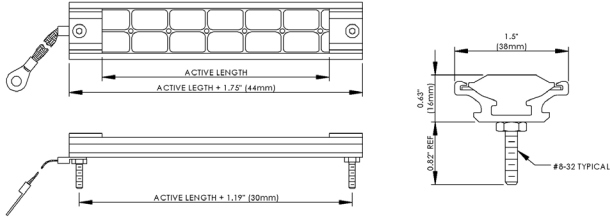

Model P-2001-I

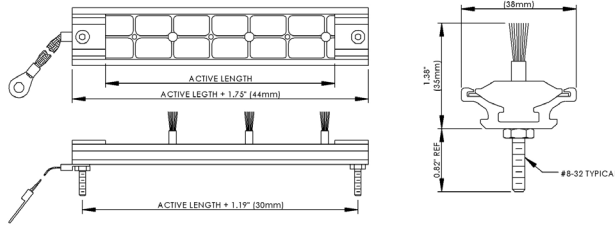

SPECIFICATIONS

Activity: 2.25 mCi per in/mm
(83.25 MBq)

Balance: ±0 V

Dimensions: 0.63in W x 1.50in H x ≥
4in L (15.8 mm x 38.1 mm x ≥
101.6 mm)

Enclosure (MODEL P-2001):
Aluminum Housing/Stainless Steel Grid

Enclosure (MODEL P-2001-I): Aluminum
Housing/Stainless Steel Grid/Stainless
Steel Brushes

Enclosure (MODEL 4275): Brass or
Stainless Air tube

Gas Input: Clean, dry air or inert gas for
use with 4275 Air Tube

Line Connection (MODEL 4275): 1/4 in NPT

Technology: Alpha

DECAY RATE:
<0.7 seconds (±1000 to 100V), ANSI/ESD
Association STM 3.1 @ 30psig, 6 inches

ACCESSORIES



P-2001 with Accessory Air Tube
Model 4275



Mounting Clip
Model MC2001

MAINTENANCE

Product is supplied complete with ionizers. It is necessary to replace ionizers every 12 months to maintain peak effectiveness.

NOTE ON ION SOURCE: All NRD ion sources are encapsulated in precious metals by means of a special patented process. This results in a static eliminator which, unlike competitive products, resists oxidation, solvents, heat, cold and vibration.

NOTICE: NRD expressly warrants that, for a period of one (1) year from the time of purchase, the ionizer will be free of defects in material (parts) and workmanship (labor).

NRD, LLC USA
800-525-8076
716-773-7634
Sales@NRDUSA.com
2937 Alt Boulevard
PO Box 310
Grand Island, NY
14072-0310 USA

NRD Asia Pte. Ltd.
+65 6679 1707
Sales@NRDAsia.com
114 Lavender Street
#08-90 CT Hub 2
Singapore 338729

To learn more, contact an NRD representative for a consultation at
1-800-525-8076 or visit **nrdstaticcontrol.com**.

