

# Staticmaster® Mini Spot Ionizer



TECHNOLOGY  
& LAB



INDUSTRIAL



AUTOMOTIVE

MODEL P-2042

ALPHA

The Staticmaster® Mini Spot Ionizer is a small, self-powered ionization device that quickly eliminates static charge. It's designed for use in a variety of applications where space is limited, and is ideal for installation inside equipment. Test results have shown that alpha energy ionizers are the only technology that does not contribute to increased particle levels in the environment.

**The Model P-2042 is an ideal product for analytical laboratories and cleanrooms, and is also appropriate for narrow webs, small trimming jobs, and photo processing.** It is also well suited for use in mini environments in semiconductor, flat panel display, optics and storage media manufacturing.

Optimum efficiency with the Mini Spot Ionizer is obtained by positioning the unit one inch from the target and grounding the ion source with the included Model 5061 Ground Wire. The Model P-2042 requires no power supply or electrical connections, resulting in ease of installation and flexibility.

The Model P-2042 is available in aluminum (Model P-2042-1000) or in 316 stainless (Model P-2042-2000).

## APPLICATIONS

- Semiconductor manufacturing, BEOL, laboratory environments

## FEATURES

- Small size
- Self-powered
- No moving parts

## BENEFITS

- Fits into small spaces
- Perfectly balanced to zero volts
- No electricity required

EVERY SITUATION IS UNIQUE. SO IS EVERY SOLUTION.®




# Staticmaster® Mini Spot Ionizer

MODELS P-2042

ALPHA

## SCHEMATICS

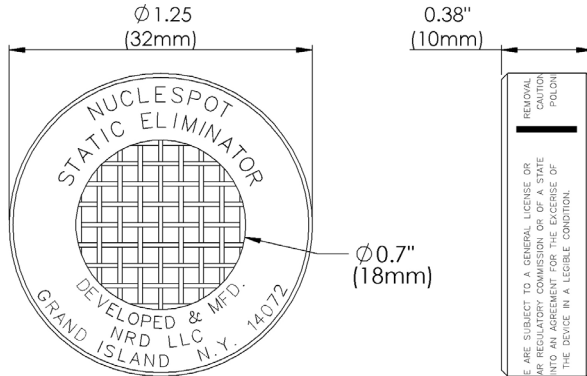

## SPECIFICATIONS

**Activity:** 5 mCi (185 MBq)

**Balance:** ±0 V

**Dimensions:** 0.38in W x 1.25in L ( 9.5 mm x 31.8 mm)

**Effective Distance:** 1in-4in (25.4 mm-100 mm)

**Enclosure (MODEL P-2042-1000):** Aluminum housing

**Enclosure (MODEL P-2042-2000):** 316 Stainless housing

**Technology:** Alpha

**Weight (MODEL P-2042-1000):** 0.5 oz (14g)

**Weight (MODEL P-2042-2000):** 1.4 oz (40g)

### DECAY RATE:

0.53 seconds grounded; 1.2 seconds ungrounded (±1000 to 100V), ANSI/ESD Association STM 3.1 @ 1 inch

## ACCESSORIES



**Ground Wire**  
Model 5061



**Mounting Clip**  
Model MC2042

## MAINTENANCE

It is necessary to replace ionizers every 12 months to maintain peak effectiveness.

**NOTE ON ION SOURCE:** All NRD ion sources are encapsulated in precious metals by means of a special patented process. This results in a static eliminator which, unlike competitive products, resists oxidation, solvents, heat, cold and vibration.

**NOTICE:** NRD expressly warrants that, for a period of one (1) year from the time of purchase, the ionizer will be free of defects in material (parts) and workmanship (labor).

### NRD, LLC USA

800-525-8076  
716-773-7634  
Sales@NRDLLC.com  
2937 Alt Boulevard  
PO Box 310  
Grand Island, NY  
14072-0310 USA

### NRD Asia Pte. Ltd.

+65 6679 1707  
Sales@NRDasia.com  
114 Lavender Street  
#08-90 CT Hub 2  
Singapore 338729

To learn more, contact an NRD representative for a consultation at **1-800-525-8076** or visit **nrdstaticcontrol.com**.

