

Staticmaster® Ionizing Air Fan



INDUSTRIAL



AUTOMOTIVE

MODEL 6200HOB

CORONA

The Staticmaster® Ionizing Air Fan provides a wide-area, high-output stream of ionized air to neutralize static “up to ten feet away.” **The Model 6200HOB is ideally suited for bench top or overhead applications.**

Notable features on the Model 6200 HOB include, variable-speed fan control, quick-change filter elements and dual squirrel-cage blower motors. An optional Model 6300 Floor Stand is also available for added positioning flexibility.

APPLICATIONS

- **Plastics, textiles, paper**

FEATURES

- **Variable speed fan control**
- **Quick-change filter elements**
- **Dual Squirrel-Cage fan motors**

BENEFITS

- **Offers wide area of coverage**
- **Ideal for benchtop or overhead applications**
- **Easy to use**

EVERY SITUATION IS UNIQUE. SO IS EVERY SOLUTION.®




Staticmaster® Ionizing Air Fan

MODEL 6200HOB

CORONA

SCHEMATICS

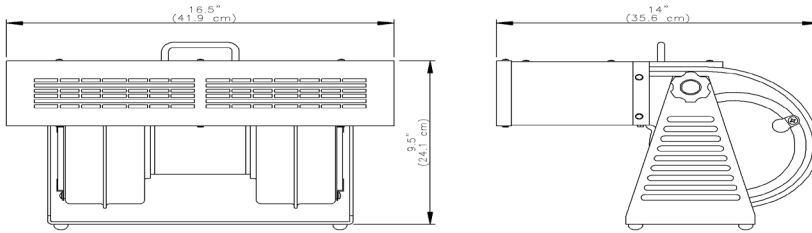

SPECIFICATIONS

Airflow: High speed, 100-300 CFM (L/s)

Dimensions: 14in W x 9.5in H x 16.5in L
(355.6 mm x 241.3 mm x 419.1 mm)

Effective Distance: 12in – 48in (304.8 mm - 1219.2 mm)

Emitter Point: Tungsten 99.99%

Enclosure: Aluminum housing

Power Supply Input Voltage: 120 V AC

Technology: Corona

Weight: 18.2 lbs. (8.25 kg)

DECAY RATE: 0.5 seconds, fan speed high
(5000 V – 500V, 20 pf plate) @ 1 foot, center

ACCESSORIES

Floor Stand
Model 6300



Replacement filter (10 pack)
Model 6302
(Image not available)

Retrofit mounting bracket
Model 6301
(Image not available)

MAINTENANCE

It is necessary to clean and balance ionizer regularly. Clean emitter points as needed.

NOTICE: NRD expressly warrants that, for a period of one (1) year from the time of purchase, the ionizer will be free of defects in material (parts) and workmanship (labor).

NRD, LLC USA
800-525-8076
716-773-7634
Sales@NRDUSA.com
2937 Alt Boulevard
PO Box 310
Grand Island, NY
14072-0310 USA

NRD Asia Pte. Ltd.
+65 6679 1707
Sales@NRDAsia.com
114 Lavender Street
#08-90 CT Hub 2
Singapore 338729

To learn more, contact an NRD representative for a consultation at
1-800-525-8076 or visit **nrdstaticcontrol.com**.

